






5 / Product Color / Ürün Renk

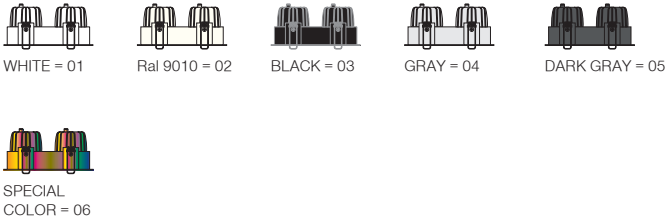

Technical Drawing / Teknik Çizim

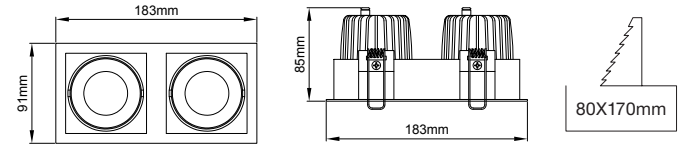

4 / Reflector Angle / Reflektör Açısı

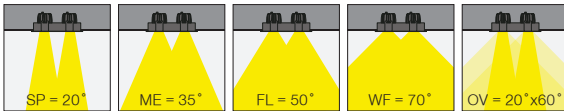

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 30° rotation on single axis with mechanical aiming lock.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Only Honeycomb Filter accesorie is available.
- Spot, Medium, Flood, Wide Flood and Oval beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 121lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Tek ekseninde 30° hareket kabiliyetine sahip mekanik kilitlemeli sistem.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağılı özel renk seçenekleri uygulanabilir.
- Sadece Balpeteđi Filtre aksesuar seçeneđi uygulanabilir.
- Dar, Orta, Geniř, Çok Geniř ve Oval lens açısı seçenekleri mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 121lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

Deepress / I01.MLR.14036














* Code example / Kod örneği:

I01.MLR.14036 . 15 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
2x15W	CRI>80	I01.MLR.14036 . (.) . (...) . (.) . (..)	2700K	3302
			3000K	3404
			3500K	3524
			4000K	3642
			5000K	3896
	CRI>90	I01.MLR.14036 . (.) . (...) . (.) . (..)	2700K	2972
			3000K	3064
			3500K	3200
			4000K	3336
			5000K	X
	CRI>98	I01.MLR.14036 . (.) . (...) . (.) . (..)	2700K	2170
			3000K	2250
			4000K	2410
	Meat / Et COB	I01.MLR.14036 . (.) . (...) . (.) . (..)	1800K	X
	Food / Gıda COB	I01.MLR.14036 . (.) . (...) . (.) . (..)	2400K	X
	FISH / Balık COB	I01.MLR.14036 . (.) . (...) . (.) . (..)	6600K	X

2	Watt - Driving Current / Watt - Sürüş Akımı	3		4		5		
		CRI / Kelvin		Reflector Angle / Reflektör Açısı		Product Color / Ürün Renk		
15	2x15W - 350mA	827	CRI>80 - 2700K	9827	CRI>98 - 2700K		SP 2x20° - Spot	 01 white
10	2x10W - 250mA	830	CRI>80 - 3000K	9830	CRI>98 - 3000K		ME 2x35° - Medium	 02 ral 9010
7	2x7W - 180mA	835	CRI>80 - 3500K	9840	CRI>98 - 4000K		FL 2x50° - Flood	 03 black
4	2x4W - 100mA	840	CRI>80 - 4000K				WF 2x70° - Wide Flood	 04 gray
		850	CRI>80 - 5000K				OV 2x20° x 60° - Oval	 05 dark gray
		927	CRI>90 - 2700K					 06 special color
		930	CRI>90 - 3000K					
		935	CRI>90 - 3500K					
		940	CRI>90 - 4000K					

(.) / Complete Code / Komple Kod