

- Aluminium profile body.
- Plastic end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser and white painted raster louvre on top..
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Up to 110lm/W efficiency.
- Emergency kit system can be integrated.



- Alüminyum profil gövde.
- Plastik kapak.
- 220-240V / 50-60Hz enerji girişli.
- Akıllı soğutma tasarımı.
- 1-10V ve DALI dim seçenekleri bulunmaktadır.
- Opal difüzör ve üzerinde beyaz boyalı sac petek.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
- 110lm/W'a kadar verim.
- Acil aydınlatma kit sistemi uygulanabilir.

Extrude / I02.LL.18033

SMD LED	.24.35	.24.43	.24.51
Led Power / Led Gücü	32W	40W	47W
System Power / Sistem Gücü	35W	43W	51W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	3254	4083
	3000K	3304	4145
	3500K	3354	4207
	4000K	3403	4269
	5000K	3505	4397
Lenght / Uzunluk (A)	1150mm	1430mm	1710mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	X	X	X
1-10V Dimming Option / 1-10V Dim Seçeneği	✓	✓	✓
Dali Dimming Option / Dali Dim Seçeneği	✓	✓	✓

Wadge

Takoz

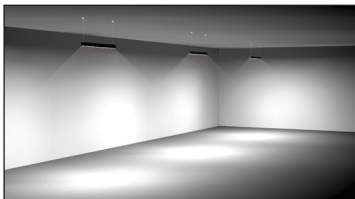

*See page 757 for ldt files.

*Işık eğrileri için sayfa 757 bakınız.