

- Aluminium profile body.
- Plastic end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Up to 110lm/W efficiency.
- Emergency kit system can be integrated.
- Steel suspension cord with up to 5mt lenght option.


- Alüminyum profil gövde.
- Plastik kapak.
- 220-240V / 50-60Hz enerji girişli.
- Akıllı soğutma tasarımı.
- 1-10V ve DALI dim seçenekleri bulunmaktadır.
- Opal difüzör.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
- 110lm/W'a kadar verim.
- Acil aydınlatma kit sistemi uygulanabilir.
- 5mt uzunluk seçeneğine kadar tercih edilebilir çelik sarkıt tel.

Extrude / I02.LL.19030

SMD LED	.24.35	.24.43	.24.51
Led Power / Led Gücü	32W	40W	47W
System Power / Sistem Gücü	35W	43W	51W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	3700	4627
	3000K	3813	4770
	3500K	3927	4910
	4000K	4045	5060
5000K	4165	5210	6295
Lenght / Uzunluk (A)	1150mm	1430mm	1710mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	X	X	X
1-10V Dimming Option / 1-10V Dim Seçeneği	✓	✓	✓
Dali Dimming Option / Dali Dim Seçeneği	✓	✓	✓

Suspension Cord

Ray Sarkıtma Teli

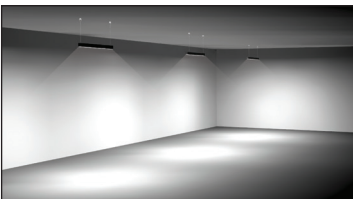

* See page 757 for ldt files.

* Işık eğrileri için sayfa 757 bakınız.