

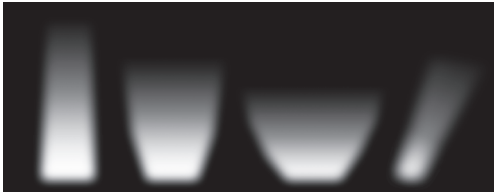
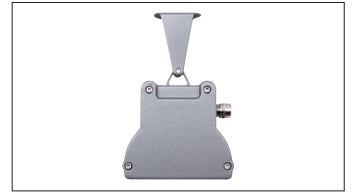
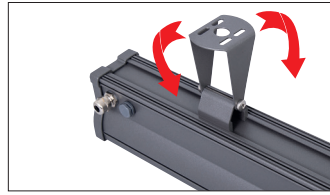
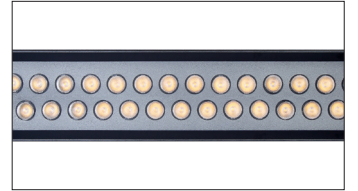


Magilight

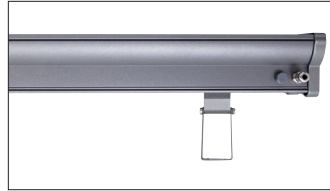

* See page 350 for ldt files. / Işık eğrileri için sayfa 350 bakınız.




EN

- Direct lighting luminaire for use with LEDs.
- Corrosion resistant aluminium profile body and die-cast aluminium end caps.
- Installation with bracket on floor, walls and ceiling surfaces.
- Mains voltage: 220-240V / 50-60Hz.
- Narrow, medium, wide and asymmetric beam angles available.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 6000K.
- Colour Led options green, red, blue and amber available.
- Suitable for illumination up to 35-meter height.
- Optionally 2 cable entries for through-wiring of mains supply cable.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Up to 133lm/W efficiency.
- High colour consistency: <3 SDCM
- RGB and RGBW options available.
- Stainless steel cable gland and mains cable provided with IP68 socket.
- Mechanical aiming lock.
- Flexible adjusting mechanism enables fitting move 180° in one axis.

TR

- Led'li simetrik ışık çıkışlı cephe aydınlatma armatürü.
- Korozyona dayanıklı alüminyum profil gövde ve alüminyum enjeksiyon sonlama kapak.
- Braketli montaj sistemi sayesinde zemin, duvar ve tavan yüzeylerine kolayca montaj edilebilir.
- 220-240V / 50-60Hz enerji girişli.
- Dar, orta, geniş, ve asimetric açı seçenekleri mevcuttur.
- 2700K, 3000K, 3500K, 4000K ve 6000K renk sıcaklığı seçenekleri mevcuttur.
- Yeşil, kırmızı, mavi ve amber renk seçenekleri mevcuttur.
- 35-metre yüksekliğe kadar aydınlatma sağlar.
- Opsiyonel olarak 2 kablo giriş terminali ile armatürler arası atlama yapılabilir.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- 133lm/W'a kadar ulaşan verim.
- Yüksek renk uyumu: <3 SDCM
- RGB ve RGBW seçenekleri mevcuttur.
- Armatürde paslanmaz kablo rekoru kullanılmaktadır ve 220V ana şebeke kablosunda IP68 korumalı konnektör bulunmaktadır.
- Mekanik kilitleme sistemi.
- Esnek montaj ayakları sayesinde tek düzlemde 180° hareket sağlar.

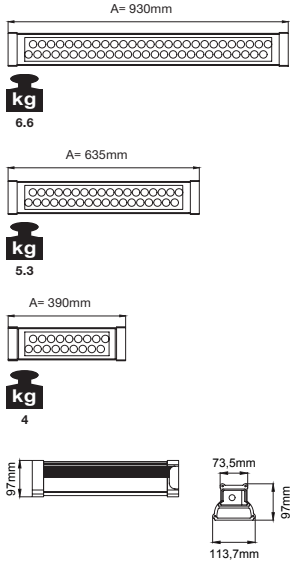

Magilight / O07.WL.16025

Order Code / Sipariş Kodu	Led Type / Tipi	System Power / Sistem Gücü	mA	No. of Leds / Led Sayısı	Lumen Tc=60° / Lümen	Kelvin / Color	Lenght / Uzunluk (A)
O07.WL.16025	Power Led	21W	350mA	18	2625	2700K	390mm
O07.WL.16025	Power Led	21W	350mA	18	2680	3000K	390mm
O07.WL.16025	Power Led	21W	350mA	18	2734	3500K	390mm
O07.WL.16025	Power Led	21W	350mA	18	2790	4000K	390mm
O07.WL.16025	Power Led	21W	350mA	18	2875	6000K	390mm
O07.WL.16025	Power Led	15W	350mA	18	1225	Red / Kırmızı	390mm
O07.WL.16025	Power Led	22W	350mA	18	1900	Green / Yeşil	390mm
O07.WL.16025	Power Led	21.50W	350mA	18	810	Blue / Mavi	390mm
O07.WL.16025	Power Led	15W	350mA	18	865	Amber	390mm
O07.WL.16025	Power Led	42W	350mA	36	5250	2700K	635mm
O07.WL.16025	Power Led	42W	350mA	36	5360	3000K	635mm
O07.WL.16025	Power Led	42W	350mA	36	4748	3500K	635mm
O07.WL.16025	Power Led	42W	350mA	36	5580	4000K	635mm
O07.WL.16025	Power Led	42W	350mA	36	5750	6000K	635mm
O07.WL.16025	Power Led	30W	350mA	36	2450	Red / Kırmızı	635mm
O07.WL.16025	Power Led	44W	350mA	36	3800	Green / Yeşil	635mm
O07.WL.16025	Power Led	43W	350mA	36	1620	Blue / Mavi	635mm
O07.WL.16025	Power Led	30W	350mA	36	1730	Amber	635mm
O07.WL.16025	Power Led	63W	350mA	54	7875	2700K	930mm
O07.WL.16025	Power Led	63W	350mA	54	8040	3000K	930mm
O07.WL.16025	Power Led	63W	350mA	54	8202	3500K	930mm
O07.WL.16025	Power Led	63W	350mA	54	8370	4000K	930mm
O07.WL.16025	Power Led	63W	350mA	54	8625	6000K	930mm
O07.WL.16025	Power Led	45W	350mA	54	3675	Red / Kırmızı	930mm
O07.WL.16025	Power Led	66W	350mA	54	5700	Green / Yeşil	930mm
O07.WL.16025	Power Led	64.50W	350mA	54	2430	Blue / Mavi	930mm
O07.WL.16025	Power Led	45W	350mA	54	2595	Amber	930mm

Magilight RGB / O07.WL.16025.RGB

Order Code / Sipariş Kodu	Led Type / Tipi	No. of Leds / Led Sayısı	Kelvin / Color	Lenght / Uzunluk (A)
O07.WL.16025.RGB	Power Led	18	RGB (R6,G6,B6)	390mm
O07.WL.16025.RGB	Power Led	36	RGB (R12,G12,B12)	635mm
O07.WL.16025.RGB	Power Led	54	RGB (R18,G18,B18)	930mm

