


# Gizmo Focus



## 5 / Product Color / Ürün Renk



## 4 / Reflector Angle / Reflektör Açısı

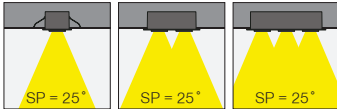

\* See page 763 for ldt files. / Işık eğrileri için sayfa 763 bakınız.

### EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 20° rotation on vertical and 20° angle on horizontal axis with mechanical aiming lock.
- Clear safety glass.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accessories are Honeycomb Filter and Colour Filter.
- Spot beam angle option available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 115lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

### TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Dikeyde 20°, yatayda 20° hareket kabiliyetine sahip mekanik kilitlemeli mafsal sistemi.
- Tamperli cam.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağlı özel renk seçenekleri uygulanabilir.
- Balpeteği Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Dar reflektör açısı seçeneği mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 115lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

# Gizmo Focus


## Gizmo Focus / I01.MLR.99801



\* Code example / Kod örneği:

I01.MLR.99801 . 7 . 827 . SP . 01  
1 2 3 4 5

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T <sub>c</sub> =50° Lümen
7W	CRI>80	I01.MLR.99801 . (.) . (...) . (.) . (.)	2700K	735
			3000K	753
			3500K	779
			4000K	807
			5000K	862
CRI>90	I01.MLR.99801 . (.) . (...) . (.) . (.)	2700K	662	
		3000K	677	
		3500K	701	
		4000K	725	
		5000K	X	

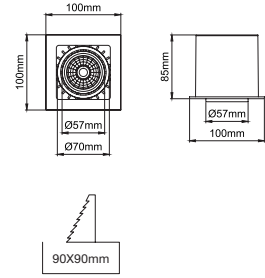

kg  
0.5


## Gizmo Focus / I01.MLR.99802



\* Code example / Kod örneği:

I01.MLR.99802 . 7 . 827 . SP . 01  
1 2 3 4 5

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T <sub>c</sub> =50° Lümen
2x7W	CRI>80	I01.MLR.99802 . (.) . (...) . (.) . (.)	2700K	1470
			3000K	1506
			3500K	1558
			4000K	1614
			5000K	1724
CRI>90	I01.MLR.99802 . (.) . (...) . (.) . (.)	2700K	1324	
		3000K	1354	
		3500K	1402	
		4000K	1450	
		5000K	X	

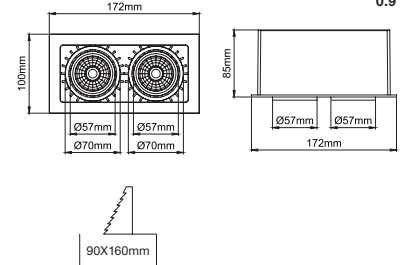

kg  
0.9


## Gizmo Focus / I01.MLR.99803



\* Code example / Kod örneği:

I01.MLR.99803 . 7 . 827 . SP . 01  
1 2 3 4 5

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T <sub>c</sub> =50° Lümen
3x7W	CRI>80	I01.MLR.99803 . (.) . (...) . (.) . (.)	2700K	2205
			3000K	2259
			3500K	2337
			4000K	2421
			5000K	2586
CRI>90	I01.MLR.99803 . (.) . (...) . (.) . (.)	2700K	1986	
		3000K	2031	
		3500K	2103	
		4000K	2175	
		5000K	X	

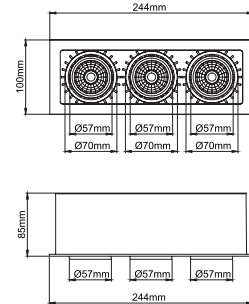

kg  
1.3

- Product code / Armatür kodu
- Power / Güç
- CRI / Kelvin
- Reflector angle / Reflektör açısı
- Colour / Ürün renk

Complete Code / Komple Kod	2	3		4		5				
	Watt - Driving Current / Watt - Sürüş Akımı	CRI / Kelvin		Reflector Angle / Reflektör Açısı		Product Color / Ürün Renk				
	7	7W - 180mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	SP	25° - Spot	01	white
	4	4W - 100mA	830	CRI>80 - 3000K	930	CRI>90 - 3000K	SP	2x25° - Spot	02	ral 9010
	7	2x7W - 180mA	835	CRI>80 - 3500K	935	CRI>90 - 3500K	SP	3x25° - Spot	03	black
	4	2x4W - 100mA	840	CRI>80 - 4000K	940	CRI>90 - 4000K			04	gray
	7	3x7W - 180mA	850	CRI>80 - 5000K					05	dark gray
	4	3x4W - 100mA							06	special color